Refrigerated cabinet "Pharmalow" L

WITH FAN ASSISTED CIRCULATION.
TEMPERATURES RANGE FROM +1 °C UP TO +15 °C.



COMMON FEATURES

Exterior cabinet and door in light gray lacquered metal and interior enclosure in white sheet metal with non-toxic finish.
Metallic door and interior led light.
Hermetic compressor unit.
Air circulation turbine throughout the interior enclosure for greater homogeneity
Automatic defrosting with water evaporation.
Level adjustable foot supports.
Door direction change.
Door with lock.

CONTROL PANEL

Temperature regulator thermostat inside.
Digital thermometer temperature reader.
Digital electronic temperature controller.

ACCESSORIES

Rack with 5 drawers and 60 dividers
Code 1001307

SPARE PARTS

Shelves
Code 1001985

OPTIONAL

Drawer with 3 compartments and 12 partitions.
Maximum quantity 8 drawers
Code 1001315



MODEL

	Part N	Capacity liters	Height / Width / Depht (interior) cm	Height / Width / Depht exterior (cm)	Power W	Number of shelves	Weight KG
PharmalowL	2101300	300	145 47 44	169 60 65	180	4	58

Comes complete with steel shelves, PVC laminated.

Storage refrigerator with double glazed anti mist door "Pharmalow" M

WITH A DIGITAL ELECTRONIC TEMPERATURE CONTROLLER. FOR ADJUSTABLE TEMPERATURES FROM +2 °C TO +8°C.
SUPPLIED WITH PRINTER. ANTI-FOG HEATED DOOR. MANUFACTURED ACCORDING TO DIN-13277 STANDARD.

NEW

MODEL

Part No.	Capacity litres	Height / Width / Depht (interior) cm	Height / Width / Depht (exterior)cm	Tem. °c	Number of shelves	Weight Kg
2101320	395	135,5 58 53,3	199,2 65 67,3	2/8	6+1	95

Comes complete with 6 steel shelves, PVC laminated.

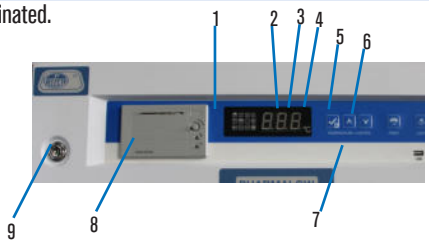

CONTROL PANEL

1 Temperature display
2 SET key / Mute key
3 Up key. Increase value.
4 Down key. Decrease value.
5 Impress
6 Light. Press to turn lights on and off.
7 USB port. For data export
8 Impresora
9 Lock with key

SPARE PARTS

Part No.
1001860
Set 2 additional guides + shelf

Code 1001877
Drawer + Guides
(Only for Pharmalow M)



Model Pharmalow M with 6 shelves.
Anti-fogging heating in the door.

Refrigerated Cabinet "Pharmalow" B

NEW

FOR ADJUSTABLE TEMPERATURES FROM 2°C TO 8°C.
AIR CIRCULATION WITH BUILT-IN EVAPORATOR.
INDUSTRIAL COMPRESSOR WITH HYDROCARBON REFRIGERANT.
MANUFACTURED ACCORDING TO DIN-13277 STANDARD.

FEATURES

Double glass door with heating to prevent condensation and automatic closing to protect samples.
Aluminum or stainless steel interior, easy to clean.
Removable shelves with label holders, flexible storage, and stable temperature.
Air circulation cooling with evaporator, ensuring uniform temperature.
Compressor with HC refrigerant, energy-efficient and environmentally friendly.

CONTROL PANEL

The microprocessor controller displays temperature with 0.1°C precision.
A 25 mm access port allows connection of monitoring, testing, or backup devices.
Multiple audible and visual alarms ensure operational safety.
.



Pharmalow B

MODELS	Code	Capacity liters	Range °C	Height / Width / Depth (inside) cm	Height / Width / Depth (external) cm	Weight Kg	Number of trays
Pharmalow B	2101331	130	2 to 8	58 55 51	81 65 63	51	2 + 1