

BUNSEN J3000 BLUE UNIVERSAL

For Butane gas. Instant safety flame push button ignition incorporating a LOCK/ON mechanism that prevents accidental fires, Unit switches off when the users hand is removed. Regulation of flame intensity and flame color. Gas fill by a simple lighter gas fuel as used common gas lighters. Long life flint. Power by a 1.5 V battery. Flame temperature: 1300 ºC.

APPLICATIONS

Microbiology, bacteriology, dentistry and for general use where a fine hot flame is required for fast heat and fusion.
Part No. 1001134



RECTANGULAR HOTPLATE "PLACFIN"

Adjustable temperature from ambient+5 °C to 130 °C.
Stability ±3 °C. Not suitable for boiling.
Coated with chemically treated aluminium, enamelled outer case.

Part No.	Width/Depth (plate) cm		Height/Width/Depth (exterior) cm			Power W	Weight Kg
7000497	23	22	8	22	30	1500	3.7

ACCESSORY: Slide support rack for Placfin

"Placfin" slide support adapter.
Made of AISI 304 stainless steel. Capacity: up to 18 slide of 76 x 25 mm (in a horizontal or inclined position).
Part No. 7000498

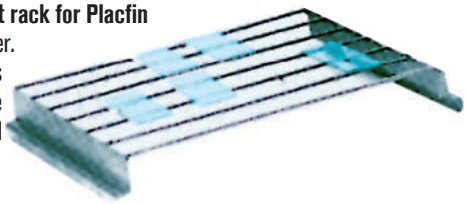

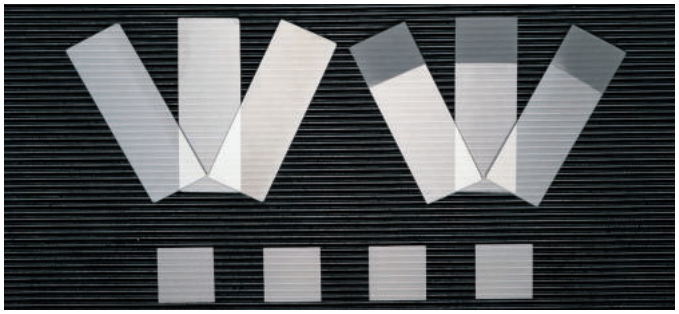

GLASS SLIDES

Slides, unground of 26 x 76 x 1.5 mm thickness.
Box of 72 units.
Part No. 5600400

Slides of 26 x 76 x 1.5 mm with ground end of 26 x 20 mm for writing.
Box of 72 units.
Part No. 5600399

Cover slide of 18 x 18 mm.
Box of 100 units.
Part No. 5600396

Cover glass of 22 x 22 mm.
Box of 100 units.
Part No. 5600397

Cover glass of 24 x 24 mm.
Box of 100 units.
Part No. 5600398

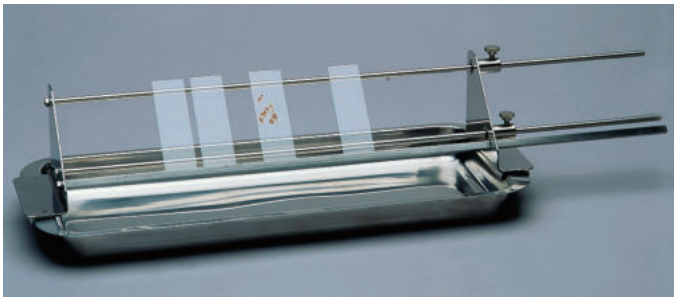

SLIDE STAINING STAND

Extendible and made of AISI 304 stainless steel. Fits tanks and trays up to 50 cm in length. Capacity 12 to 14 slides inclined at an angle.
Part No. 6000904

ACCESSORY: Long rectangular instrument tray.
Made from AISI 304 stainless steel, 350mm long x 150mm wide.
Part No. 8080207

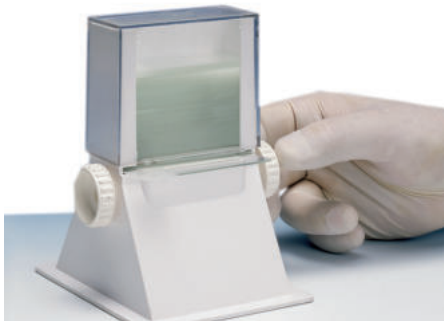

SLIDE DISPENSER

Made of ABS plastic with a transparent polycarbonate lid. With single slide manual extraction.
Capacity 50 slides of 76 x 26 mm.
Part No. 1001366

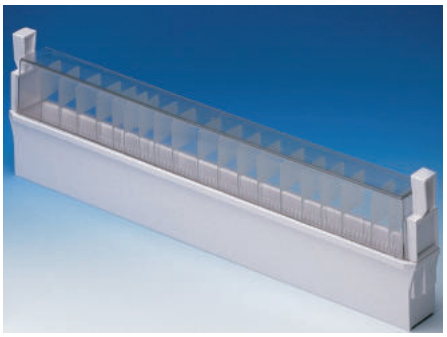

SLIDE SUPPORT RACK, FOR 26 x 76 mm SLIDES

Made from ABS plastic with transparent polycarbonate lid. Holds 100 slides in a vertical position, with numbered guides and index table.
Part No. 1001367



FORCEPS FOR LIFTING SLIDES

Made of AISI 304 stainless steel, with flat jaws.
Length: 105 mm. Suitable for lifting, slides, watch glass or small flat object.
Part No. 1000105

Rectangular precision hotplate "Plactronic"

ADJUSTABLE TEMPERATURE FROM AMBIENT +5 UP TO 200 °C STABILITY ±0.5 °C.
WITH ELECTRONIC DIGITAL TEMPERATURE AND TIME CONTROL DISPLAY.
SUITABLE FOR THERMAL TESTS (NOT SUITABLE FOR BOILING TESTS).
SURFACE PLATE COATED WITH P.T.F.E. FOR PROTECTION AGAINST CHEMICALS.

FEATURES

Digitalelectronic temperature and timer control. and Digital display (3 digits).
Display resolution: 1°C.
Temperature probe Pt 100.
DUR aluminium alloy hotplate's coated with P.T.F.E., with heating elements embedded in the plate surface.
Main case, heater element and protective grill, made of AISI 304 stainless steel.

SAFETY:
CONFORMS TO EN61010. OVER TEMPERATURE SAFETY CUTOUT FITTED.

Maximum precision



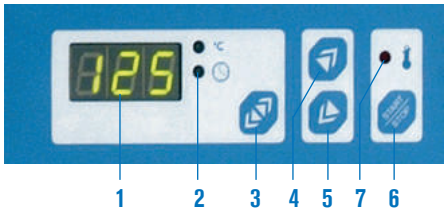

CONTROL PANEL

1. Digital display of temperature and time.
2. Indicator lamp to show the parameters (temperature or time).
3. Push button to select visualised parameter.
4. Push button to increase parameter value.
5. Push button to decrease parameter value.
6. Push button start and stop.
7. Indicator alarm if the plate is over temperature.

MODELS

Part No.	Width / Depth (plate) cm	Height / Width / Depth (exterior) cm	Power W	Weight Kg
6155100	24 24	13 25 42	700	7.5
6156100	20 40	13 22 57	800	8
6157100	25 60	13 27 77	1000	16.5

Rectangular hotplate "Placfin"

ADJUSTABLE HOT PLATE TEMPERATURE
FROM AMBIENT +5 °C UP TO 130 °C. STABILITY ±3 °C.
SUITABLE FOR THERMAL TESTS (BUT NOT BOILING).



FEATURES

Temperature control by a hydraulic thermostat.
Protected thermometer from 0 °C to 130 °C.
Hotplate surface protected by chemically treated aluminium, with heating elements distributed throughout the hotplate's surface.
Enamelled external case, resistant against corrosive chemicals.

CONTROL PANEL

Hydraulic thermostat control, synchronised with an indicator lamp when in operation.

MODEL

Part No.	Width / Depth (plate) cm	Height / Width / Depth (exterior) cm	Power W	Weight Kg
7000497	23 22	11 22 30	1500	3.7

ACCESSORY

Slide support adapter made of AISI 304 stainless steel. Capacity: up to 18 slide of 76 x 255 mm (in a horizontal position).
Part No. 7000498

